DM74LS08 Quad 2-Input AND Gates

DM74LS08 Quad 2-Input AND Gates

General Description

FAIRCHILD

SEMICONDUCTOR


This device contains four independent gates each of which performs the logic AND function.

Ordering Code:

| Order Number | Package Number | Package Description |
|--------------|----------------|---|
| DM74LS08M | M14A | 14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-120, 0.150 Narrow |
| DM74LS08SJ | M14D | 14-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide |
| DM74LS08N | N14A | 14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide |

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

Connection Diagram



Function Table

 $\mathbf{Y} = \mathbf{A}\mathbf{B}$

| Inp | Inputs | |
|-----|--------|---|
| Α | В | Y |
| L | L | L |
| L | Н | L |
| н | L | L |
| Н | Н | Н |

H = HIGH Logic Level L = LOW Logic Level

© 2000 Fairchild Semiconductor Corporation DS006347

www.fairchildsemi.com

Absolute Maximum Ratings(Note 1)

| Supply Voltage | 7V |
|--------------------------------------|-----------------------------------|
| Input Voltage | 7V |
| Operating Free Air Temperature Range | $0^{\circ}C$ to $+70^{\circ}C$ |
| Storage Temperature Range | $-65^{\circ}C$ to $+150^{\circ}C$ |

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Recommended Operating Conditions

| Symbol | Parameter | Min | Nom | Max | Units |
|-----------------|--------------------------------|------|-----|------|-------|
| V _{CC} | Supply Voltage | 4.75 | 5 | 5.25 | V |
| / _{IH} | HIGH Level Input Voltage | 2 | | | V |
| / _{IL} | LOW Level Input Voltage | | | 0.8 | V |
| ОН | HIGH Level Output Current | | | -0.4 | mA |
| OL | LOW Level Output Current | | | 8 | mA |
| Τ _Α | Free Air Operating Temperature | 0 | | 70 | °C |

Electrical Characteristics

over recommended operating free air temperature range (unless otherwise noted)

| Symbol | Parameter | Conditions | Min | Typ (Note 2) | Max | Units |
|------------------|-----------------------------------|---|-----|-----------------|-------|-------|
| VI | Input Clamp Voltage | $V_{CC} = Min, I_I = -18 \text{ mA}$ | | | -1.5 | V |
| V _{OH} | HIGH Level Output Voltage | $V_{CC} = Min, I_{OH} = Max,$ $V_{IH} = Min$ | 2.7 | 3.4 | | V |
| V _{OL} | LOW Level Output Voltage | $V_{CC} = Min, I_{OL} = Max,$ $V_{IL} = Max$ | | 0.35 | 0.5 | v |
| | | $I_{OL} = 4 \text{ mA}, V_{CC} = Min$ | | 0.25 | 0.4 | |
| l _l | Input Current @ Max Input Voltage | $V_{CC} = Max, V_I = 7V$ | | | 0.1 | mA |
| I _{IH} | HIGH Level Input Current | $V_{CC} = Max, V_I = 2.7V$ | | | 20 | μΑ |
| IIL | LOW Level Input Current | $V_{CC} = Max, V_I = 0.4V$ | | | -0.36 | mA |
| los | Short Circuit Output Current | V _{CC} = Max (Note 3) | -20 | | -100 | mA |
| I _{CCH} | Supply Current with Outputs HIGH | V _{CC} = Max | | 2.4 | 4.8 | mA |
| I _{CCL} | Supply Current with Outputs LOW | V _{CC} = Max | | 4.4 | 8.8 | mA |


Switching Characteristics

at $V_{CC}=5V$ and $T_{A}=25^{\circ}C$


| | Parameter | $R_L = 2 k\Omega$ | | | | |
|------------------|--|------------------------|-----|------------------------|-----|-------|
| Symbol | | C _L = 15 pF | | C _L = 50 pF | | Units |
| | | Min | Max | Min | Max | |
| t _{PLH} | Propagation Delay Time LOW-to-HIGH Level Output | 4 | 13 | 6 | 18 | ns |
| t _{PHL} | Propagation Delay Time HIGH-to-LOW Level Output | 3 | 11 | 5 | 18 | ns |

Note 2: All typicals are at V_{CC} = 5V, T_A = 25^{\circ}C.


Note 3: Not more than one output should be shorted at a time, and the duration should not exceed one second.

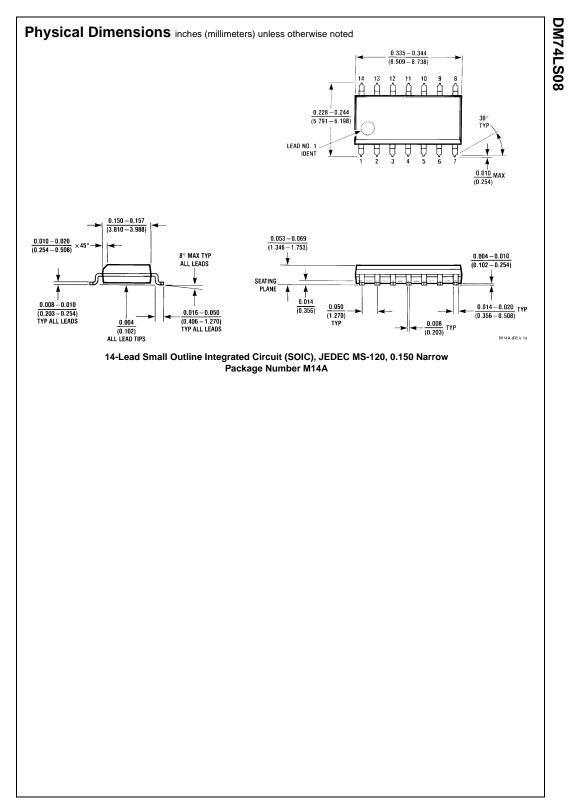

www.fairchildsemi.com

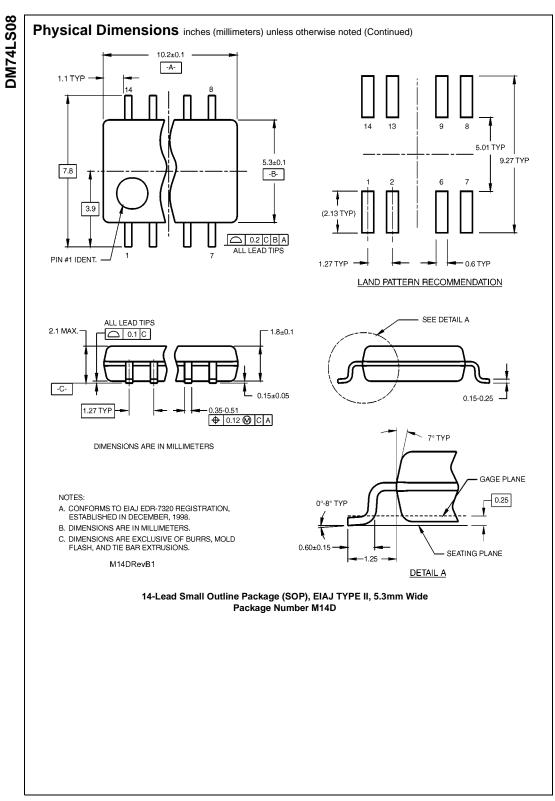

www.fairchildsemi.com

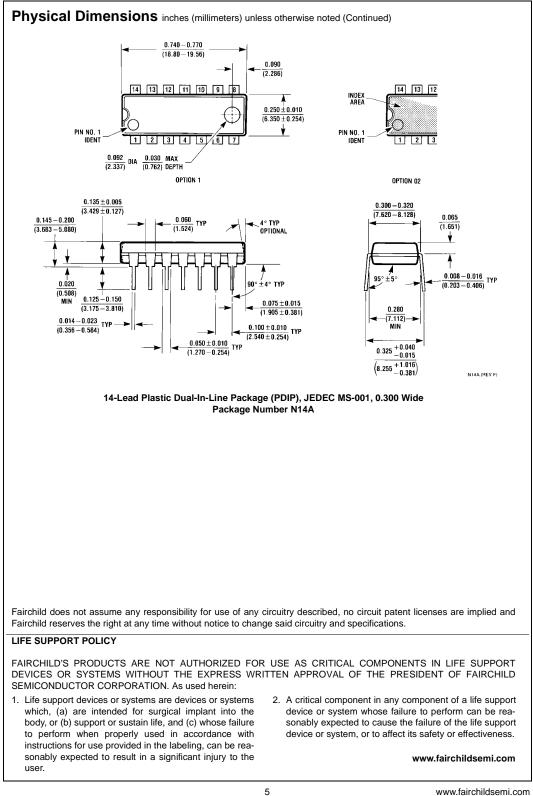

DM74LS08 Quad 2-Input AND Gates

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.